

4 端口 SMT 90° 贴片电桥

型号 - Q1M902 Rev.A

5-11GHz 4端口3dB 90度电桥；表面贴装




机电性能

本技术规格书内容变化恕不另行通知

工作频段	GHz	5-11
标称相位差	Deg. (Typ.)	90
端口VSWR	:1 (Max.)	1.3
插入损耗 ¹	dB(Max.)	0.6
幅度平衡	dB(Max.)	±0.6
相位平衡	Deg. (Max.)	±5
隔离度	dB(Min.)	18
功率 ²	W(Max.)	额定(CW): 50

端口配置表

INPUT	J1	J2	J3	J4
J1	-	ISOLATION	-3dB/0°	-3dB/90°
J2	ISOLATION	-	-3dB/90°	-3dB/0°
J3	-3dB/0°	-3dB/90°	-	ISOLATION
J4	-3dB/90°	-3dB/0°	ISOLATION	-



重量 g(Max.) 1 外形尺寸³ mm 5.08x10.16x1.80 (LxWxH)

封装类型 表面贴装

表面处理 沉金


温度指标 工作: -55~+85°C; 储存: -55~+100°C

环境指标 N/A

定制要求 N/A

注释 1. 不包含理论插损3dB和耦合幅度不平衡 2. 功率需满足匹配驻波比不大于1.2
3. 除非特别标注，默认公差: x.±1; .x±0.5; .xx±0.25

2D外形图





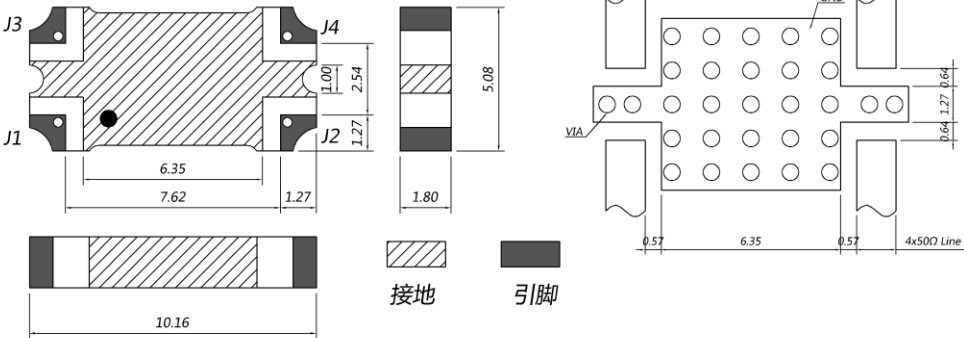


4 端口 SMT 90° 贴片电桥

型号 - Q1M902 Rev.A

5-11GHz 4端口3dB 90度电桥；表面贴装

典型曲线

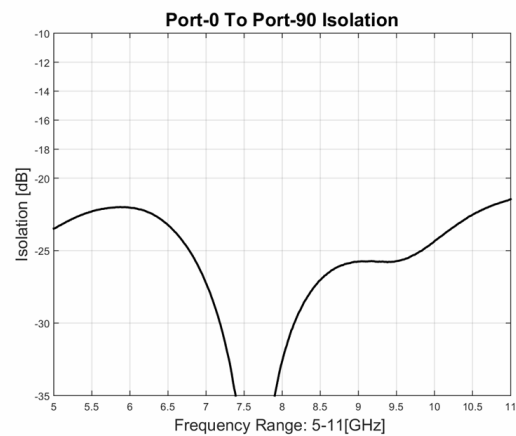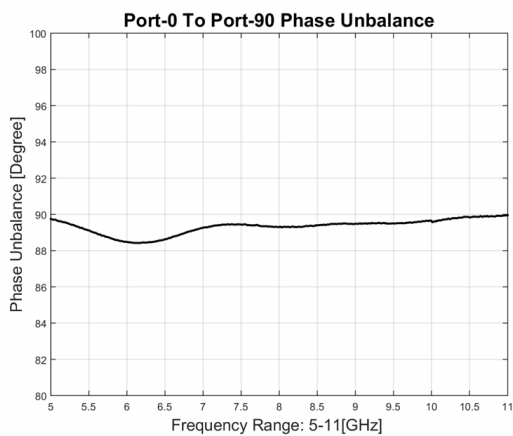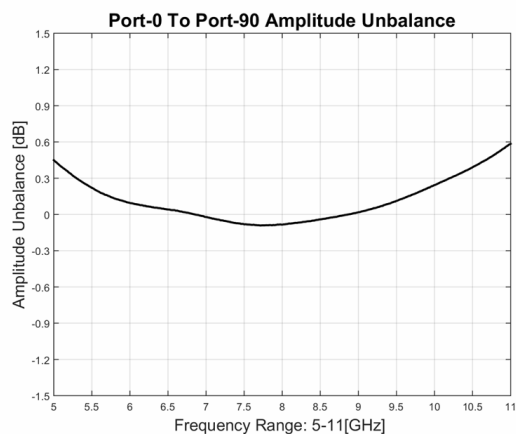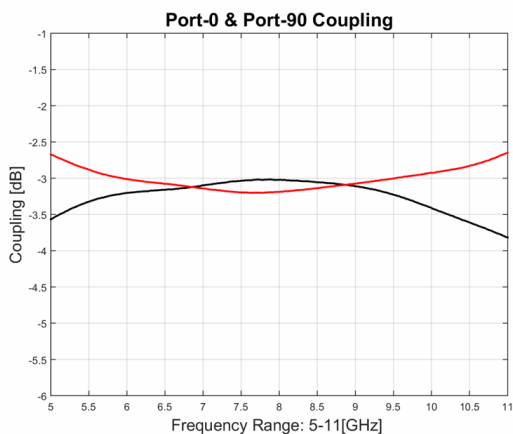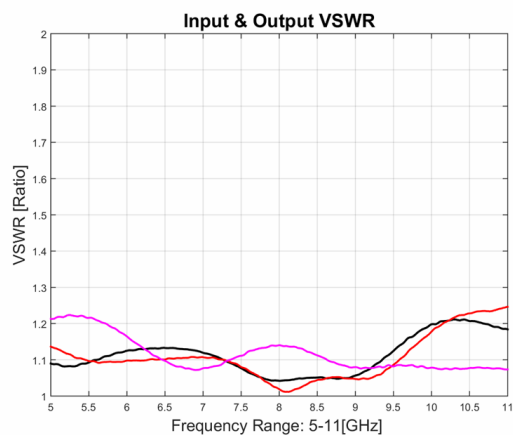

典型测试环境：温度25℃；相对湿度60%